


**DOUBLE
HORSE** TYRES
DRIVE MILES CAREFREE

**MADE IN
BANGLADESH**

Manufactured by
Jamuna Tyre & Rubber Industries Ltd.



JAMUNA GROUP

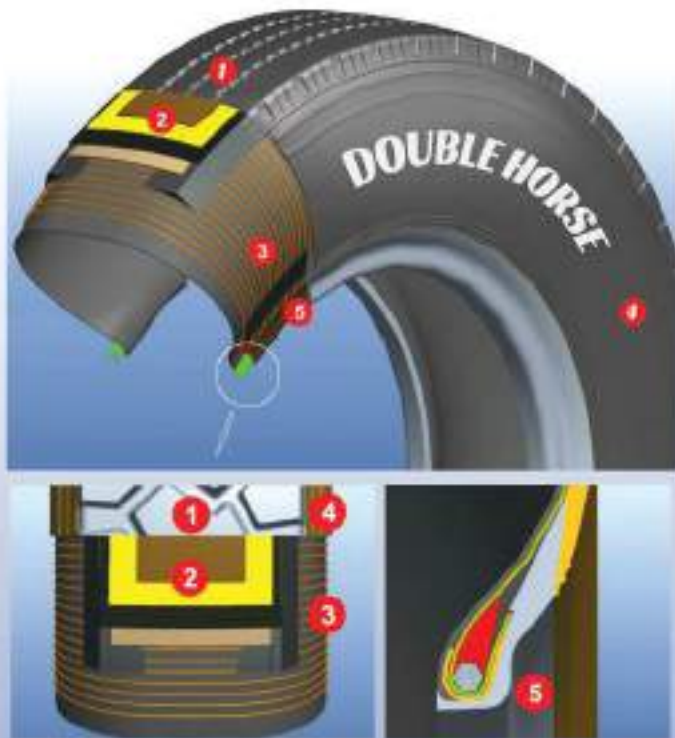

**DOUBLE
HORSE** TYRES
DRIVE MILES CAREFREE

Tread
Steel Belts
Radial Construction Casing
Sidewall
Bead Wire



JAMUNA GROUP

load range conversion table

Load Rang	Ply rating	Load Rang	Ply rating
B	4	H	16
C	6	J	18
D	8	L	20
E	10	M	22
F	12	N	24
G	14		

Inflation pressure conversion table


kPa	bar	PSI	kg/cm ²
100	1.0	15	1.0
150	1.5	22	1.5
200	2.0	29	2.0
250	2.5	36	2.5
300	3.0	44	3.1
350	3.5	51	3.6
400	4.0	58	4.1
450	4.5	65	4.6
500	5.0	73	5.1
550	5.5	80	5.6
600	6.0	87	6.1
650	6.5	94	6.6
700	7.0	102	7.1
750	7.5	109	7.7
800	8.0	116	8.2
850	8.5	123	8.7
900	9.0	131	9.2
950	9.5	138	9.7
1000	10.0	145	10.2
1050	10.5	152	10.7

load index conversion table

Load index	kg	Load index	kg	Load index	kg
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

Speed symbol conversion table

Speed Symbol	km/h	Speed Symbol	km/h
A1	5	J	100
A2	10	K	110
A3	15	L	120
A4	20	M	130
A5	25	N	140
A6	30	P	150
A7	35	Q	160
A8	40	R	170
B	50	S	180
C	60	T	190
D	65	U	200
E	70	H	210
F	80	V	240
G	90	W	270

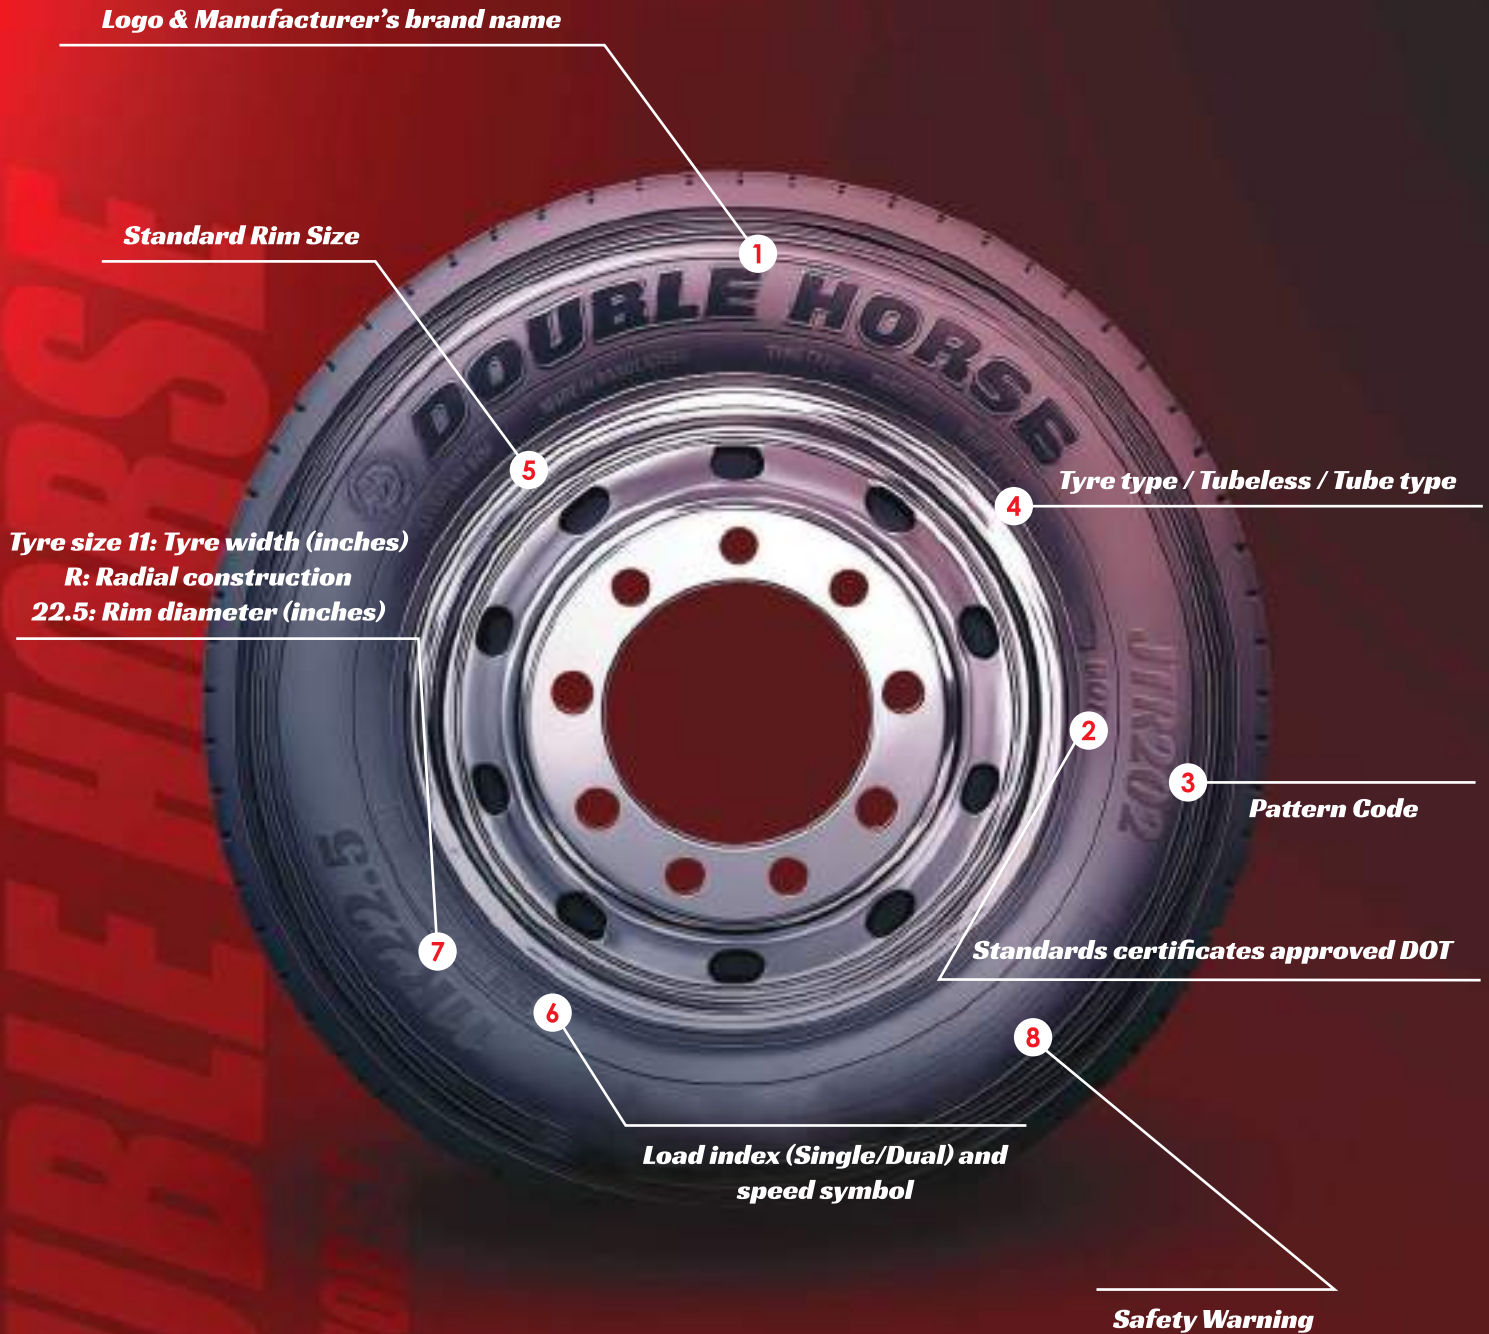



EXPLANATION OF SYMBOLS



**LONG
HAUL**



REGIONAL



**SHIP
ROCKY
ROAD**



**OFF
ROAD**

TRUCK & BUS RADIAL TYRES

Technical Information

Size	PLY Rating	Pattern	Load Index		Speed Symbol	Overall Diameter (mm)	Section Width (mm)	Max.Load(kg)		Inflated Pressure(kpa)		Standard Rim
			Single	Dual				Single	Dual	Single	Dual	
295/80R22.5	18	JTR204	152	149	K	1044	298	3550	3250	900	900	9.00
11R22.5	16	JTR202	146	143	K	1054	279	3000	2725	830	830	8.25
11R24.5	16	JTR202	149	146	K	1104	279	3250	3000	830	830	8.25



TRUCK & BUS RADIAL TYRES

Technical Information

Size	PLY Rating	Pattern	Load Index		Speed Symbol	Overall Diameter (mm)	Section Width (mm)	Max. Load(kg)		Inflated Pressure(kpa)		Standard Rim
			Single	Dual				Single	Dual	Single	Dual	
9.00R20	16	JTR561	144	142	K	1019	259	2800	2650	900	900	7.0
10.00R20	18	JTR561	149	146	K	1054	278	3250	3000	930	930	7.5
10.00R20	18	JTR572	149	146	K	1054	278	3250	3000	930	930	7.5
10.00R20	18	JTR581	149	146	K	1054	278	3250	3000	930	930	7.5
10.00R20	18	JTR201	149	146	K	1054	278	3250	3000	930	930	7.5
10.00R20	18	JTR561 PLUS	149	146	K	1054	278	3250	3000	930	930	7.5
10.00R20	18	JTR581 PLUS	149	146	K	1054	278	3250	3000	930	930	7.5
11.00R20	18	JTR201	152	149	K	1085	293	3550	3250	930	930	8.0
12.00R20	18	JTR201	154	151	K	1125	315	3750	3450	830	830	8.5



LIGHT TRUCK RADIAL

Technical Information

Size	PLY Rating	Pattern	Load Index		Speed Symbol	Overall Diameter (mm)	Section Width (mm)	Max.Load(kg)		Inflated Pressure(kpa)		Standard Rim
			Single	Dual				Single	Dual	Single	Dual	
7.50R16	14	JTR571	123	119	K	805	215	1550	1360	760	760	6.00G
8.25R16	16	JTR571	128	124	K	855	235	1800	1600	760	760	6.50H
7.50R16	14	JTR561	123	119	K	805	215	1550	1360	760	760	6.00G
8.25R16	16	JTR561	128	124	K	855	235	1800	1600	760	760	6.50H
7.50R16	14	JTR203	123	119	K	805	215	1550	1360	760	760	6.00G
8.25R16	16	JTR203	128	124	K	855	235	1800	1600	760	760	6.50H
165R13C	8	JPR103	94	93	S	594	165	670	650	450	450	4.50B
185R14C	8	JPR103	102	100	T	650	188	850	800	450	450	5 1/2J
195R15C	8	JPR103	106	104	S	690	198	950	900	450	450	5 1/2J
205/70R15C	8	JPR103	106	104	R	669	209	950	900	450	450	6J
205R16C	8	JPR108	110	108	Q	736	208	1060	1000	450	450	6J

103

203

561

571

108

PASSENGER CAR RADIAL

Technical Information

Size	Pattern	Load index	Speed Symbol	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	TREAD DEPTH (mm)	MAX LOAD (kg)	MAX PRESSURE (kpa)	RIM
165/80R13	JPR101	83	S	594	165	7.2	487	300	4.50B
175/70R13	JPR101	82	T	576	177	7.2	475	300	5.00B
175/70R14	JPR101	84	T	602	177	7.2	500	300	5J
185/70R14	JPR101	88	H	616	189	8	560	300	5½J
195/65R15	JPR102	91	H	635	201	8.2	615	250	6J
205/65R15	JPR102	94	H	647	209	8	670	300	6J
215/65R16	JPR102	98	H	686	221	8	750	300	6½J

102

101



SPORT UTILITY VEHICLES

Technical Information

Size	Pattern	Load index	Speed Symbol	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Max. Load (kg)	Max Pressure (kpa)	Rim
265/70R16	JPR104	112	S	778	272	9.5	1120	300	8J
235/55R17	JPR106	99	V	690	245	8	775	300	7 1/2J
265/65R17	JPRAT21	112	S	776	272	11	1120	300	8J
215/80R15	JPRAT22	106	S	725	216	12.5	950	340	6J
215/80R16	JPRAT22	107	S	750	216	12.5	975	340	6J

104

106

AT21

AT22



Feature :

High Load Capacity: Designed for heavy-duty commercial use.

Durability: Reinforced sidewalls with long-lasting tread life for fewer replacements.

Fuel Efficiency: Optimized tread reduces rolling resistance and saves fuel.

Safety: Strong grip and stability on mud, loose and rough terrains.

All-Weather Performance: Reliable traction in both wet and dry conditions.

Strong Sidewall Protection: Added resistance to impacts and road hazards on rough roads.

Comfortable Ride: Reduced vibrations for a smooth, comfortable drive.

Superior Handling: Enhanced grip for smooth and controlled driving.

Quiet Performance: Minimizes road noise for a comfortable ride.

All-Season Versatility: Performs reliably on all roads and conditions.

Key Benefits :

Ideal Choice: Durable, cost-effective tires for commercial and everyday use.



JAMUNA GROUP

Factory: Jamuna Industrial Park, Bejura, Madhabpur, Habiganj-3330, Bangladesh

☎ +8801324242515

✉ info@doublehorsetyres.com

🌐 doublehorsetyres.com